



Impeller : 5 blades ,made of PBT resin

扇 叶: 5叶 PBT塑料

Frame : Made of die-cast Aluminum ADC-12

扇 框: 压铸铝 ADC-12


Motor : Shaded pole induction motor

電 機: 蔽極异步电机

Motor Protection : Impedance protection

电机保护: 阻抗保护


Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InchH2O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M115BA1H	B/S	115	50/60	0.28/0.21	25/19	2600/3000	85/105	2.4/3.0	0.28/0.34	70/85	43/49	520
M115BA2H	B/S	230	50/60	0.13/0.09	17/14	2600/3000	85/105	2.4/3.0	0.28/0.34	70/85	43/49	520

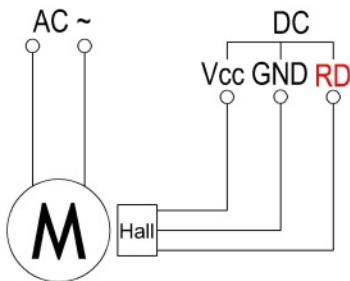


Alarm function(RD signal) of all the AC cooling fan according to customer demand production.

全系列AC散热风扇均可按客户需求制作报警功能(RD信号)。

Air Flow & Static Pressure Curve

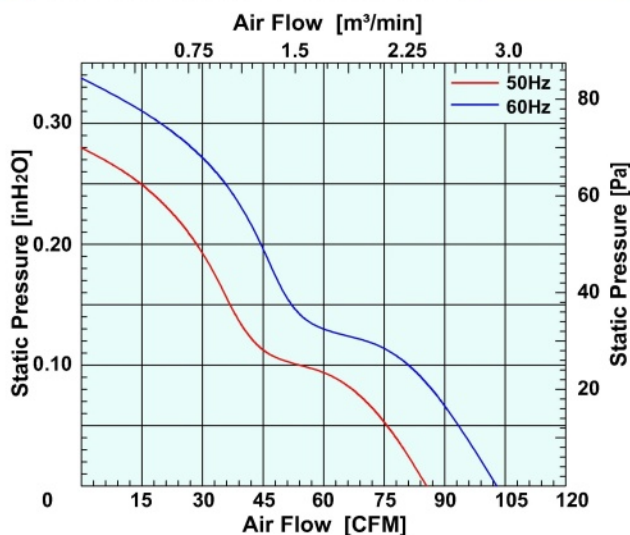

Dimensions Drawing

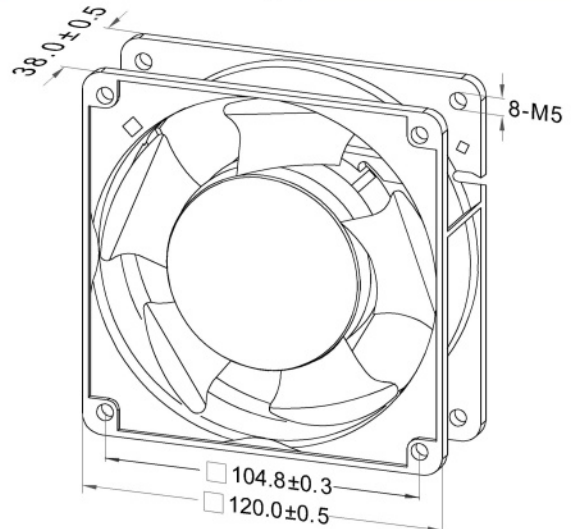

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。

