

# M4015 DC AXIAL FAN Series

## 40 x 40 x 15 mm

- AUTO (RESTAR)
- PWM
- FG
- RD SIGNAL H
- RD SIGNAL L



Impeller : 7 blades ,made of plastic PBT UL94 V-0

扇 叶: 7叶,PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH <sub>2</sub> O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
M4015LD0	B/S	5	3.6~6.8	0.12	4000	5.8	0.164	0.132	32.9	18.9	22
M4015LD1	B/S	12	6.0~13.5	0.05	4000	5.8	0.164	0.132	32.9	18.9	22
M4015LD2	B/S	24	18.0~26.5	0.04	4000	5.8	0.164	0.132	32.9	18.9	22
M4015MD0	B/S	5	3.6~6.8	0.21	6000	8.13	0.230	0.202	50.3	25.3	23
M4015MD1	B/S	12	6.0~13.5	0.10	6000	8.13	0.230	0.202	50.3	25.3	23
M4015MD2	B/S	24	18.0~26.5	0.08	6000	8.13	0.230	0.202	50.3	25.3	23
M4015HD1	B/S	12	6.0~13.5	0.14	8000	11.36	0.321	0.355	88.4	32.6	24
M4015HD2	B/S	24	18.0~26.5	0.10	8000	11.36	0.321	0.355	88.4	32.6	24
M4015VD1	B/S	12	6.0~13.5	0.19	10000	13.6	0.385	0.484	120.5	39.6	24.5
M4015VD2	B/S	24	18.0~26.5	0.12	10000	13.6	0.385	0.484	120.5	39.6	24.5

### Dimensions Drawing

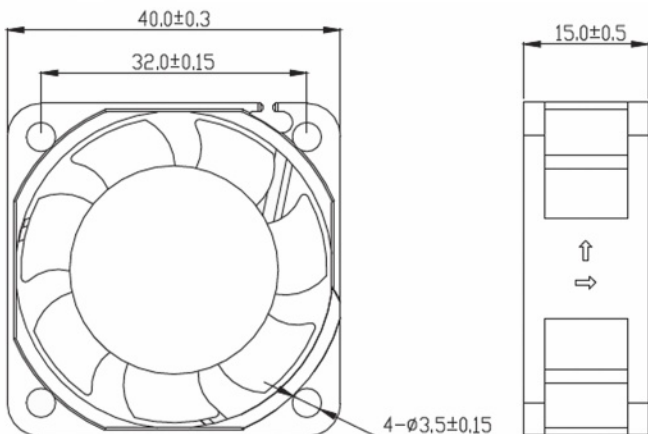

### Air Flow and Static Pressure

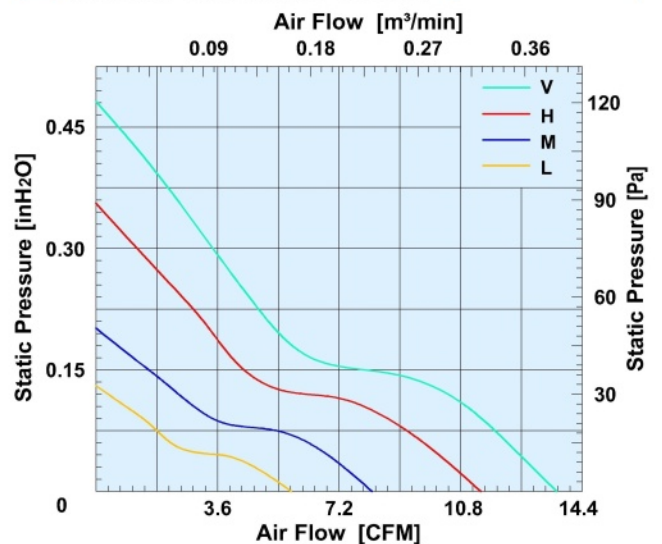

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。