

AUTO
(RESTAR)

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC AXIAL FAN

80 x 80 x 25 mm

M8025

Series



Impeller : 7 blades ,made of plastic PBT UL94 V-0

扇 叶: 7叶,PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M8025LD1	B/S	12	6.0~13.5	0.11	2500	28.91	0.82	0.11	27.4	28.3	65
M8025LD2	B/S	24	18.0~26.5	0.07	2500	28.91	0.82	0.11	27.4	28.3	65
M8025MD1	B/S	12	6.0~13.5	0.20	3000	36.63	1.04	0.16	39.8	35.2	68
M8025MD2	B/S	24	18.0~26.5	0.11	3000	36.63	1.04	0.16	39.8	35.2	68
M8025HD1	B/S	12	6.0~13.5	0.23	3500	40.5	1.15	0.21	52.3	37.5	70
M8025HD2	B/S	24	18.0~26.5	0.13	3500	40.5	1.15	0.21	52.3	37.5	70
M8025HD4	B/S	48	36.0~54.0	0.06	3500	40.5	1.15	0.21	52.3	37.5	70
M8025VD1	B/S	12	6.0~13.5	0.33	4000	48.7	1.38	0.26	64.7	42.8	72
M8025VD2	B/S	24	18.0~26.5	0.16	4000	48.7	1.38	0.26	64.7	42.8	72
M8025VD4	B/S	48	36.0~54.0	0.09	4000	48.7	1.38	0.26	64.7	42.8	72
M8025SD2	B/S	24	18.0~26.5	0.23	4500	52.91	1.51	0.33	82.2	49.0	75
M8025SD4	B/S	48	36.0~54.0	0.10	4500	52.91	1.51	0.33	82.2	49.0	75

Air Flow and Static Pressure

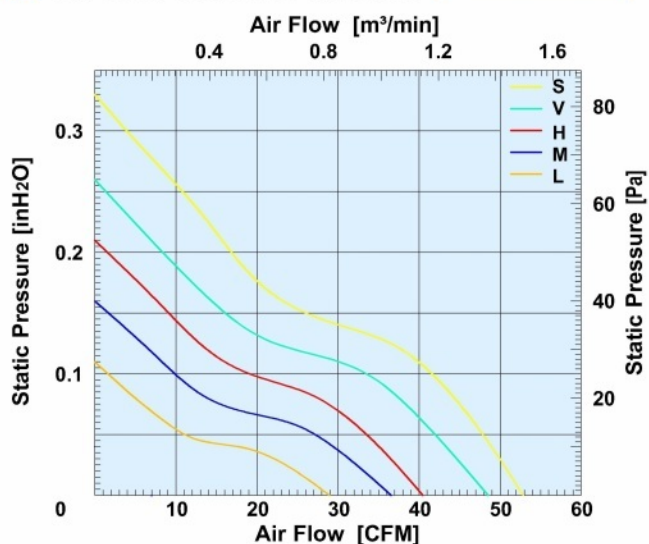

Dimensions Drawing

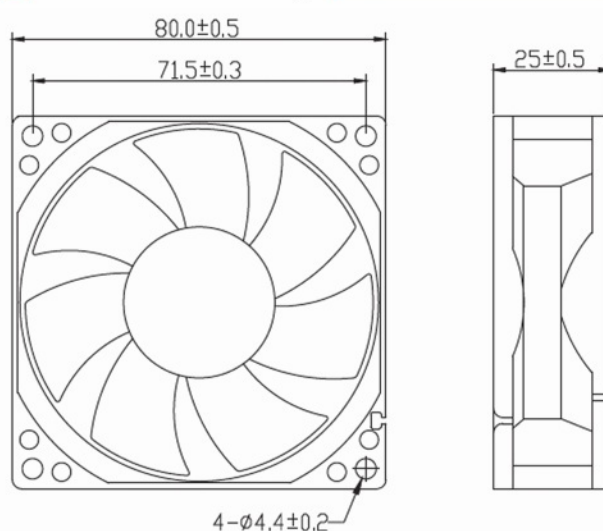

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。



MUTUAL MOTOR

直流軸流風扇

www.mutualmotor.com