



M9225
Series

DC AXIAL FAN
□ 92 x 92 x 25 mm

AUTO
RESTART

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

Impeller : 7 blades ,made of plastic PBT UL94 V-0

扇 叶: 7叶,PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0

扇 框: PBT塑料制, 阻燃等级UL94 V-0


Motor : 4 Poles brushless DC motor

電 機: 4极无刷直流




Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH₂O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
M9225LD1	B/S	12	6.0~13.5	0.18	2000	40.91	1.16	0.11	27.4	27.5	82
M9225LD2	B/S	24	18.0~26.5	0.11	2000	40.91	1.16	0.11	27.4	27.5	82
M9225MD1	B/S	12	6.0~13.5	0.23	2500	50.66	1.43	0.13	52.3	33.6	85
M9225MD2	B/S	24	18.0~26.5	0.14	2500	50.66	1.43	0.13	52.3	33.6	85
M9225MD4	B/S	48	36.0~54.0	0.07	2500	50.66	1.43	0.13	52.3	33.6	85
M9225HD1	B/S	12	6.0~13.5	0.36	3500	60.25	1.71	0.23	64.7	41.0	87
M9225HD2	B/S	24	18.0~26.5	0.21	3500	60.25	1.71	0.23	64.7	41.0	87
M9225HD4	B/S	48	36.0~54.0	0.12	3500	60.25	1.71	0.23	64.7	41.0	87
M9225VD2	B/S	24	18.0~26.5	0.25	4500	72.8	2.06	0.37	82.2	45.0	88
M9225VD4	B/S	48	36.0~54.0	0.15	4500	72.8	2.06	0.37	82.2	45.0	88

Dimensions Drawing

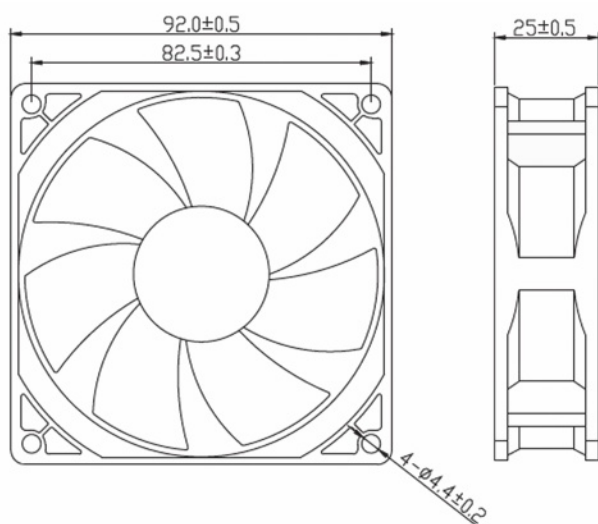

Air Flow and Static Pressure

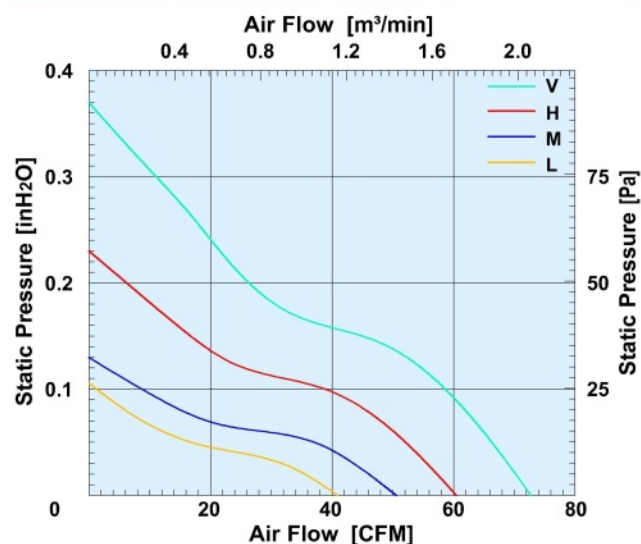

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。