

AUTO
(RESTAR)

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC AXIAL FAN

□ 92 x 92 x 38 mm

M9238
[增压型一]
Series



Impeller : 7 blades ,made of plastic PBT UL94 V-0

扇 叶: 7叶,PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH2O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M9238LD1	B/S	12	6.0~13.5	0.28	3500	76.7	2.17	0.33	82.2	40.5	197
M9238LD2	B/S	24	18.0~26.5	0.23	3500	76.7	2.17	0.33	82.2	40.5	197
M9238LD4	B/S	48	36.0~54.0	0.10	3500	76.7	2.17	0.33	82.2	40.5	197
M9238MD1	B/S	12	6.0~13.5	0.72	4500	102.3	2.90	0.60	149.4	45.0	200
M9238MD2	B/S	24	18.0~26.5	0.41	4500	102.3	2.90	0.60	149.4	45.0	200
M9238MD4	B/S	48	36.0~54.0	0.15	4500	102.3	2.90	0.60	149.4	45.0	200
M9238HD1	B/S	12	6.0~13.5	1.0	5500	115.5	3.27	0.90	224.1	53.6	202
M9238HD2	B/S	24	18.0~26.5	0.52	5500	115.5	3.27	0.90	224.1	53.6	202
M9238HD4	B/S	48	36.0~54.0	0.25	5500	115.5	3.27	0.90	224.1	53.6	202
M9238VD1	B/S	12	6.0~13.5	1.23	6500	148.5	4.20	1.27	316.2	60.0	205
M9238VD2	B/S	24	18.0~26.5	0.65	6500	148.5	4.20	1.27	316.2	60.0	205
M9238VD4	B/S	48	36.0~54.0	0.33	6500	148.5	4.20	1.27	316.2	60.0	205
M9238SD1	B/S	12	6.0~13.5	1.42	7500	167.3	4.73	1.60	360.0	65.0	206
M9238SD2	B/S	24	18.0~26.5	0.73	7500	167.3	4.73	1.60	360.0	65.0	206
M9238SD4	B/S	48	36.0~54.0	0.38	7500	167.3	4.73	1.60	360.0	65.0	206

Air Flow and Static Pressure

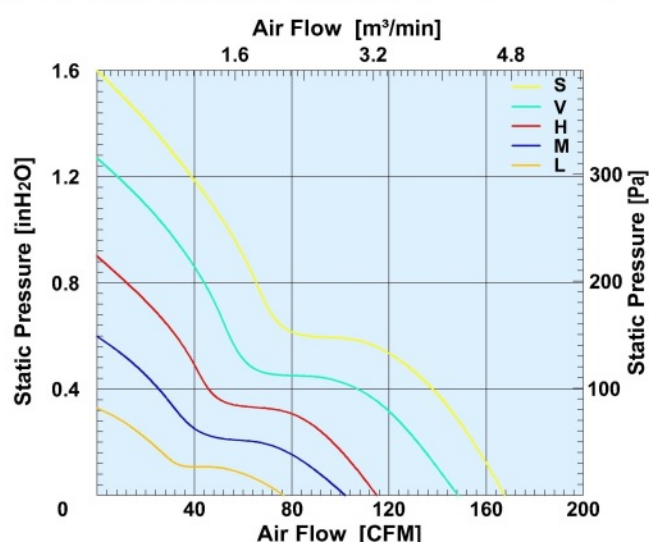

Dimensions Drawing

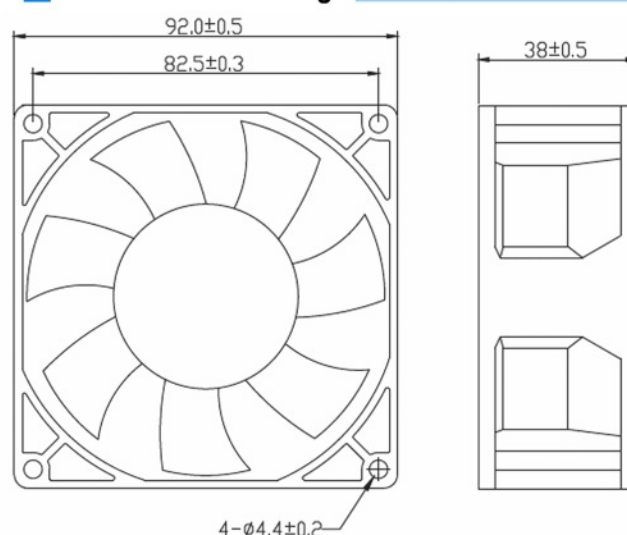

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。



MUTUAL MOTOR

直流軸流風扇

www.mutualmotor.com