

AUTO
(RESTAR)

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC AXIAL FAN

120x120x25 mm

M12025
[高速版]
Series



Impeller : 7 blades ,made of plastic PBT UL94 V-0

扇 叶: 7叶,PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M12025LD1	B/S	12	6.0~13.5	0.55	3500	95.34	2.70	0.34	84.7	41.8	165
M12025LD2	B/S	24	18.0~26.5	0.35	3500	95.34	2.70	0.34	84.7	41.8	165
M12025LD4	B/S	48	36.0~54.0	0.15	3500	95.34	2.70	0.34	84.7	41.8	165
M12025MD1	B/S	12	6.0~13.5	0.85	4500	125.2	3.55	0.72	179.3	49.0	168
M12025MD2	B/S	24	18.0~26.5	0.43	4500	125.2	3.55	0.72	179.3	49.0	168
M12025MD4	B/S	48	36.0~54.0	0.21	4500	125.2	3.55	0.72	179.3	49.0	168
M12025HD1	B/S	12	6.0~13.5	1.31	5500	152.4	4.31	1.01	251.5	57.0	170
M12025HD2	B/S	24	18.0~26.5	0.66	5500	152.4	4.31	1.01	251.5	57.0	170
M12025HD4	B/S	48	36.0~54.0	0.34	5500	152.4	4.31	1.01	251.5	57.0	170
M12025VD1	B/S	12	6.0~13.5	2.05	6500	180.2	5.10	1.32	328.7	63.0	173
M12025VD2	B/S	24	18.0~26.5	1.0	6500	180.2	5.10	1.32	328.7	63.0	173
M12025VD4	B/S	48	36.0~54.0	0.55	6500	180.2	5.10	1.32	328.7	63.0	173

Air Flow and Static Pressure

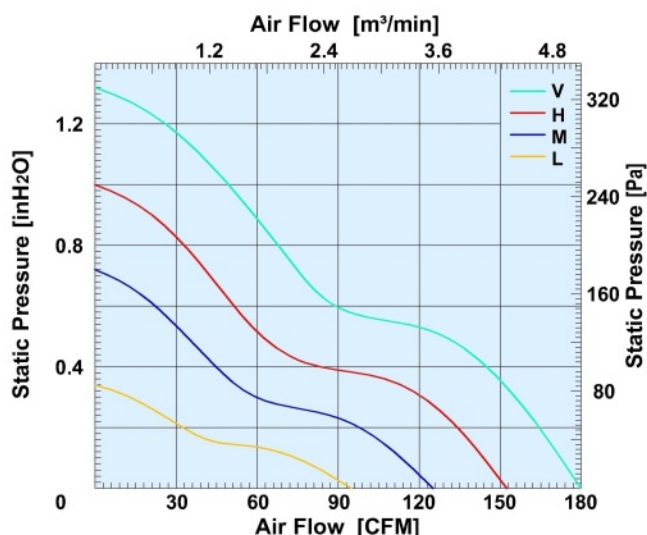

Dimensions Drawing

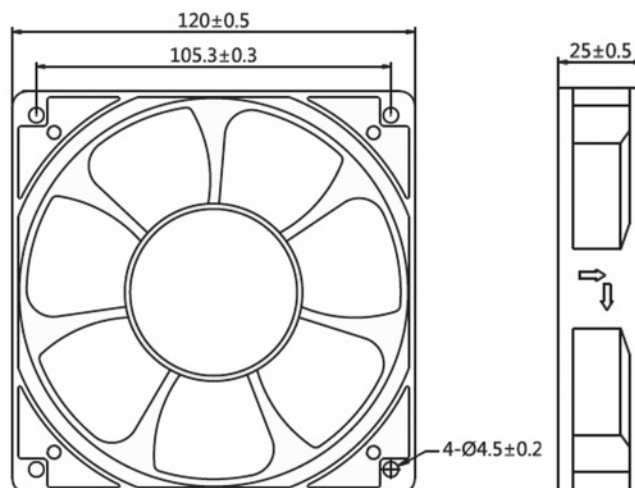

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。



MUTUAL MOTOR

直流軸流風扇

www.mutualmotor.com