

AUTO
(RESTAR)

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC AXIAL FAN

□ 120x120x38 mm

M12038
[增压型]
Series



Impeller : 9 blades ,made of plastic PBT UL94 V-0

扇 叶: 9叶,PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M12038LD1	B/S	12	6.0~13.5	0.64	2500	115.0	3.25	0.35	87.15	38.0	290
M12038LD2	B/S	24	18.0~26.5	0.33	2500	115.0	3.25	0.35	87.15	38.0	290
M12038LD4	B/S	48	36.0~54.0	0.18	2500	115.0	3.25	0.35	87.15	38.0	290
M12038MD1	B/S	12	6.0~13.5	1.11	3500	166.4	4.71	0.64	159.4	46.5	292
M12038MD2	B/S	24	18.0~26.5	0.62	3500	166.4	4.71	0.64	159.4	46.5	292
M12038MD4	B/S	48	36.0~54.0	0.28	3500	166.4	4.71	0.64	159.4	46.5	292
M12038HD1	B/S	12	6.0~13.5	2.57	4500	215.9	6.11	1.10	273.9	63.0	295
M12038HD2	B/S	24	18.0~26.5	1.30	4500	215.9	6.11	1.10	273.9	63.0	295
M12038HD4	B/S	48	36.0~54.0	0.65	4500	215.9	6.11	1.10	273.9	63.0	295
M12038VD1	B/S	12	6.0~13.5	4.22	5500	266.5	7.55	1.60	398.4	68.0	298
M12038VD2	B/S	24	18.0~26.5	2.12	5500	266.5	7.55	1.60	398.4	68.0	298
M12038VD4	B/S	48	36.0~54.0	1.10	5500	266.5	7.55	1.60	398.4	68.0	298

Air Flow and Static Pressure

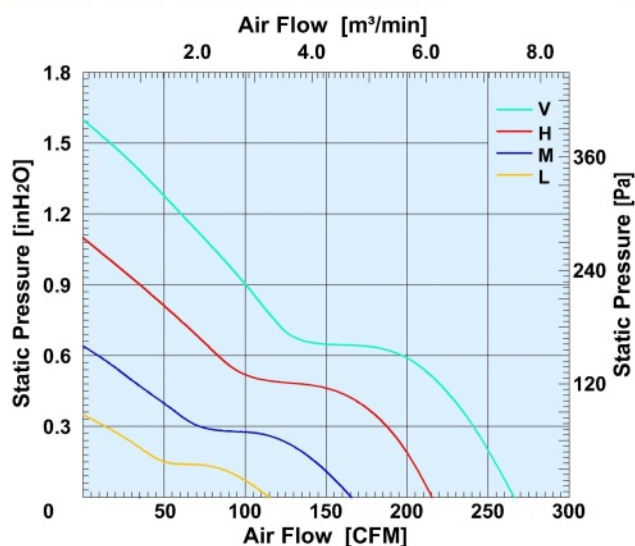

Dimensions Drawing

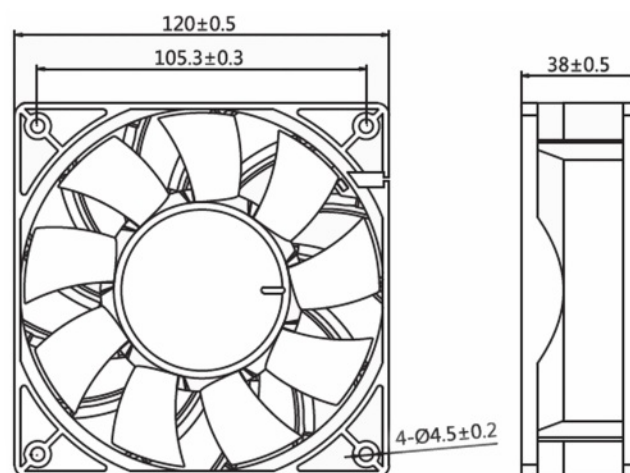

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。