

AUTO
RESTART

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC BLOWER

60 x 60 x 15 mm

M6015
Series



Impeller : Made of plastic PBT UL94 V-0

風 輪: PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0

扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH2O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M6015LD0	B/S	5	3.6~6.8	0.25	3500	3.55	0.10	0.43	107	33	61
M6015LD1	B/S	12	6.0~13.5	0.13	3500	3.55	0.10	0.43	107	33	61
M6015MD1	B/S	12	6.0~13.5	0.20	4000	3.85	0.11	0.45	112	37	63
M6015MD2	B/S	24	18.0~26.5	0.12	4000	3.85	0.11	0.45	112	37	63
M6015HD1	B/S	12	6.0~13.5	0.28	4500	4.45	0.126	0.61	151.9	40	62
M6015HD2	B/S	24	18.0~26.5	0.15	4500	4.45	0.126	0.61	151.9	40	62


MUTUAL MOTOR

直
流
鼓
風
機

Air Flow and Static Pressure

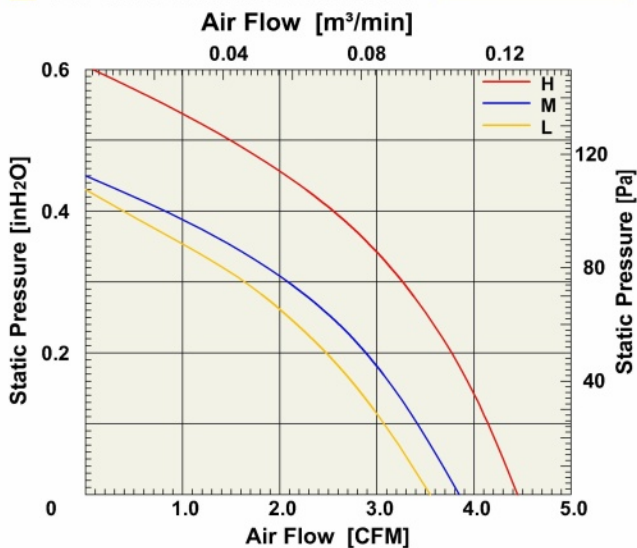

Dimensions Drawing

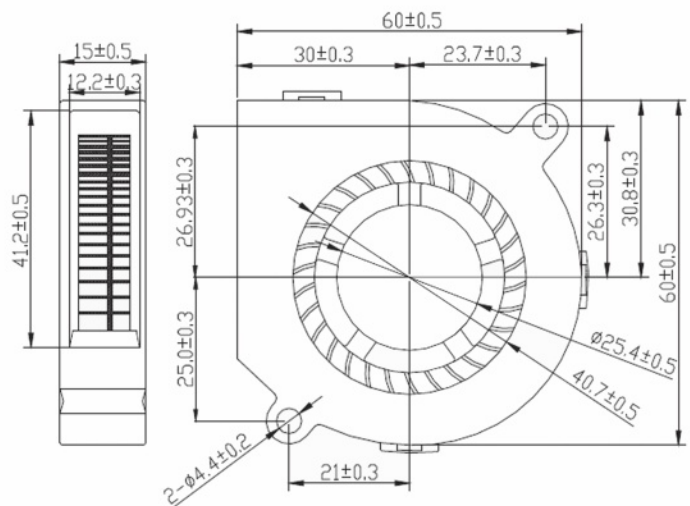

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。

www.mutualmotor.com