

M20060 EC AXIAL FAN Series

200x200x60mm

AUTO
RESTAR

PWM

FG

RD
SIGNAL H

RD
SIGNAL L



Impeller : 5 blades ,made of plastic PBT UL94 V-0

扇 叶: 5叶,PBT塑料制,阻燃等级UL94 V-0

Frame : Made of Aluminum die-casting ADC-12


扇 框: 压铸铝 ADC-12

Motor : 8 Poles brushless DC motor


電 機: 8极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Voltage Range (电压范围) [VAC]	Freq. (频率) [Hz]	Input Power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M20060LE1	Ball	110	80~130	50/60	40	2000	410.93	11.64	0.29	72.2	56.3	2385
M20060LE2	Ball	220	100~240	50/60	40	2000	410.93	11.64	0.29	72.2	56.3	2385
M20060ME1	Ball	110	80~130	50/60	50	2500	513.66	14.55	0.36	89.6	60.2	2392
M20060ME2	Ball	220	100~240	50/60	50	2500	513.66	14.55	0.36	89.6	60.2	2392
M20060HE1	Ball	110	80~130	50/60	70	3000	616.4	17.46	0.45	112	65.8	2400
M20060HE2	Ball	220	100~240	50/60	70	3000	616.4	17.46	0.45	112	65.8	2400

Dimensions Drawing

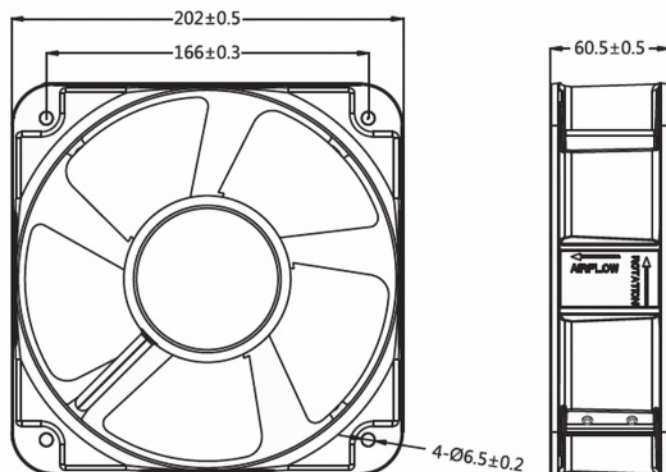

Air Flow and Static Pressure

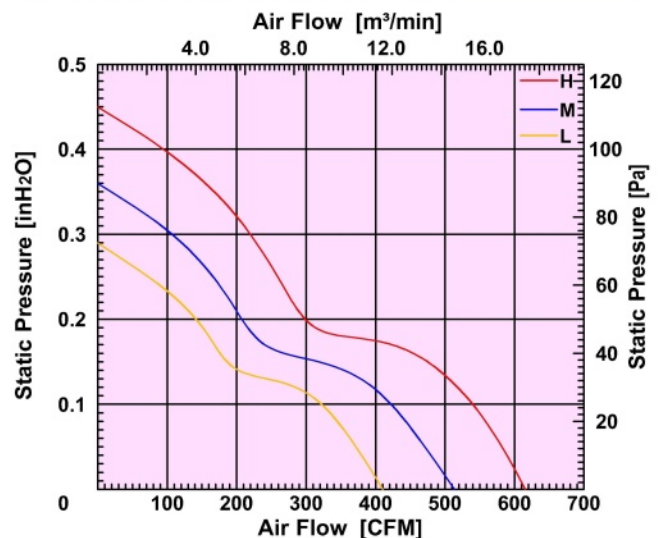

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。