

AUTO
RESTART

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC BLOWER

75 x 75 x 25 mm

M7525

Series



Impeller : Made of plastic PBT UL94 V-0

風 輪: PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0

扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH2O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M7525LD1	B/S	12	6.0~13.5	0.11	2000	6.31	0.18	0.2	49.8	34	64
M7525LD2	B/S	24	18.0~26.5	0.08	2000	6.31	0.18	0.2	49.8	34	64
M7525MD1	B/S	12	6.0~13.5	0.22	2500	8.5	0.24	0.32	79.7	36	64
M7525MD2	B/S	24	18.0~26.5	0.11	2500	8.5	0.24	0.32	79.7	36	64
M7525HD1	B/S	12	6.0~13.5	0.26	3000	9.21	0.26	0.43	107.1	40	65
M7525HD2	B/S	24	18.0~26.5	0.14	3000	9.21	0.26	0.43	107.1	40	65
M7525VD1	B/S	12	6.0~13.5	0.42	3500	11.11	0.31	0.54	134.5	43	65
M7525VD2	B/S	24	18.0~26.5	0.23	3500	11.11	0.31	0.54	134.5	43	65


MUTUAL MOTOR

直
流
鼓
風
機

Air Flow and Static Pressure

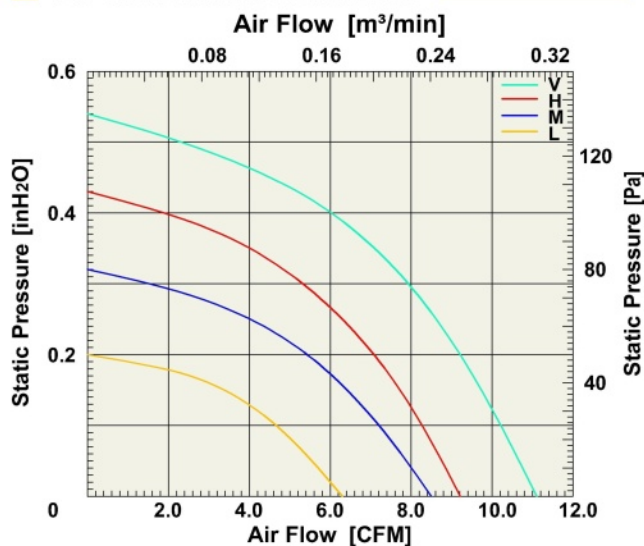

Dimensions Drawing

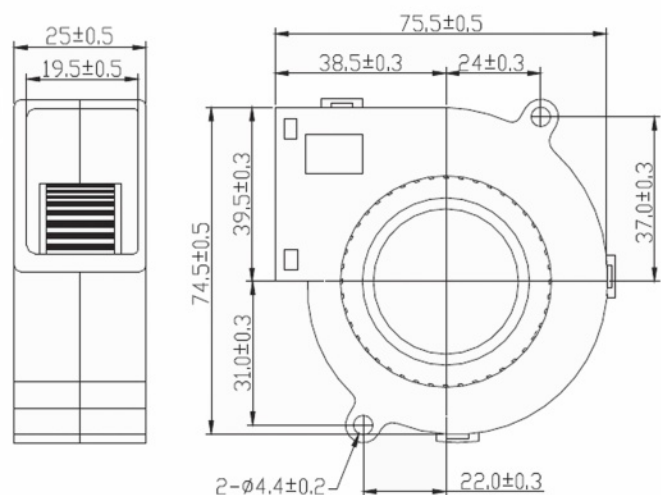

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。

www.mutualmotor.com