

AUTO
RESTAR

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

EC AXIAL FAN

M25489

Ø 254 x 89 mm

Series



Impeller : 3 blades ,made of plastic PBT UL94 V-0

扇 叶: 3叶,PBT塑料制,阻燃等级UL94 V-0

Frame : Made of die-cas Aluminum ADC-12

扇 框: 压铸铝 ADC-12

Motor : 8 Poles brushless DC motor


電 機: 8极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Voltage Range (电压范围) [VAC]	Freq. (频率) [Hz]	Input Power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH2O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M25489LE1	Ball	110	80~130	50/60	31	2000	565	16	0.65	161.85	63.8	2580
M25489LE2	Ball	220	100~240	50/60	35	2000	565	16	0.65	161.85	63.8	2580
M25489ME1	Ball	110	80~130	50/60	95	3000	864	24.5	1.36	338.6	73.5	2590
M25489ME2	Ball	220	100~240	50/60	100	3000	864	24.5	1.36	338.6	73.5	2590
M25489HE1	Ball	110	80~130	50/60	145	3500	1060	30	1.56	387.2	78.6	2600
M25489HE2	Ball	220	100~240	50/60	150	3500	1060	30	1.56	387.2	78.6	2600


MUTUAL MOTOR

EC 軸流風扇

Air Flow & Static Pressure Curve

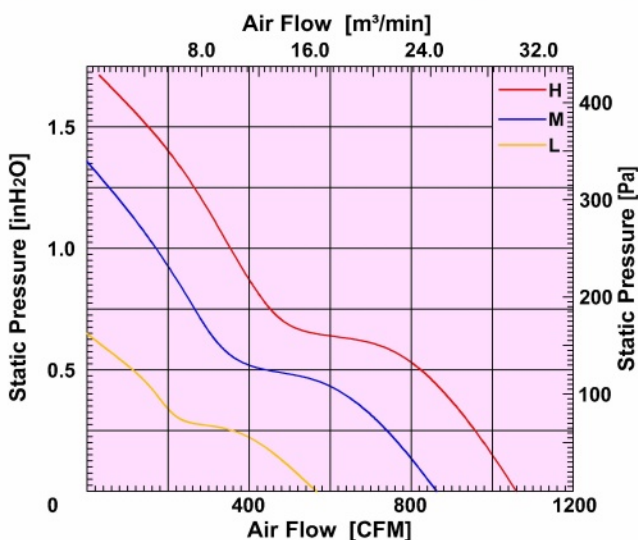

Dimensions Drawing

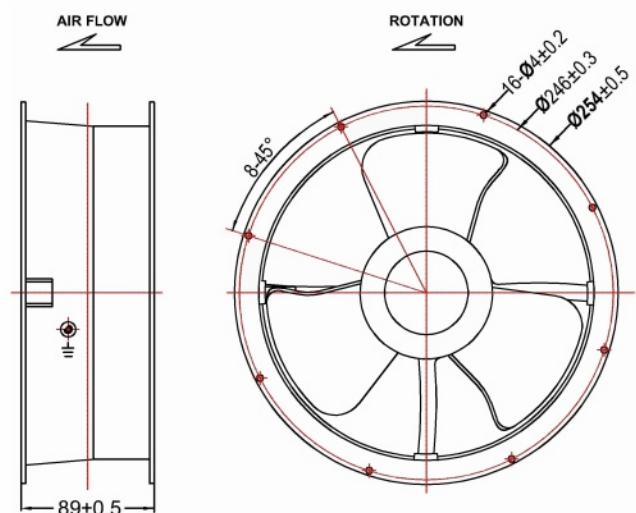

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。

www.mutualmotor.com