

AUTO
RESTAR

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC BLOWER

120x120x32 mm

M12032
Series



Impeller : Made of plastic PBT UL94 V-0

風 輪: PBT塑料制, 阻燃等级 UL94 V-0

Frame : Made of plastic PBT UL94 V-0

扇 框: PBT塑料制, 阻燃等级 UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M12032LD1	B/S	12	6.0~13.5	0.6	2500	25.11	0.71	0.80	199	50	218
M12032LD2	B/S	24	18.0~26.5	0.29	2500	25.11	0.71	0.80	199	50	218
M12032MD1	B/S	12	6.0~13.5	0.8	2800	26.13	0.74	1.012	252	53	220
M12032MD2	B/S	24	18.0~26.5	0.35	2800	26.13	0.74	1.012	252	53	220
M12032MD4	B/S	48	36.0~54.0	0.18	2800	26.13	0.74	1.012	252	53	220
M12032HD1	B/S	12	6.0~13.5	1.0	3000	27.32	0.77	1.13	281.4	55.5	220
M12032HD2	B/S	24	18.0~26.5	0.6	3000	27.32	0.77	1.13	281.4	55.5	220
M12032HD4	B/S	48	36.0~54.0	0.3	3000	27.32	0.77	1.13	281.4	55.5	220
M12032VD1	B/S	12	6.0~13.5	1.46	3300	29.02	0.82	1.4	348	60	220
M12032VD2	B/S	24	18.0~26.5	0.75	3300	29.02	0.82	1.4	348	60	220
M12032VD4	B/S	48	36.0~54.0	0.4	3300	29.02	0.82	1.4	348	60	220


MUTUAL MOTOR

直
流
鼓
風
機

Air Flow & Static Pressure Curve

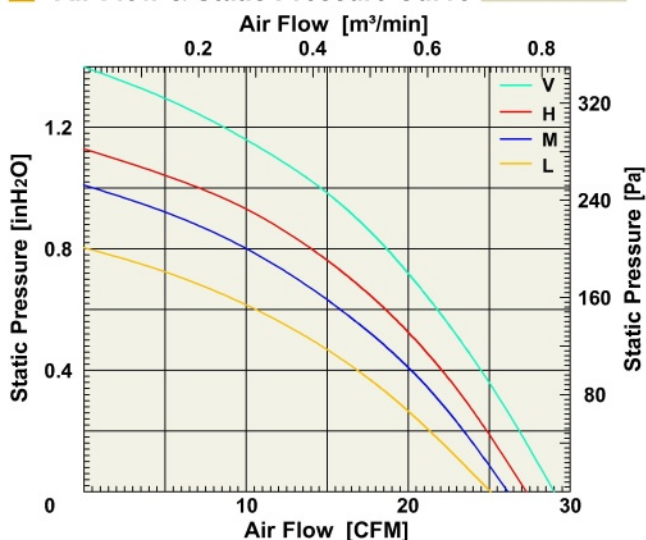

Dimensions Drawing

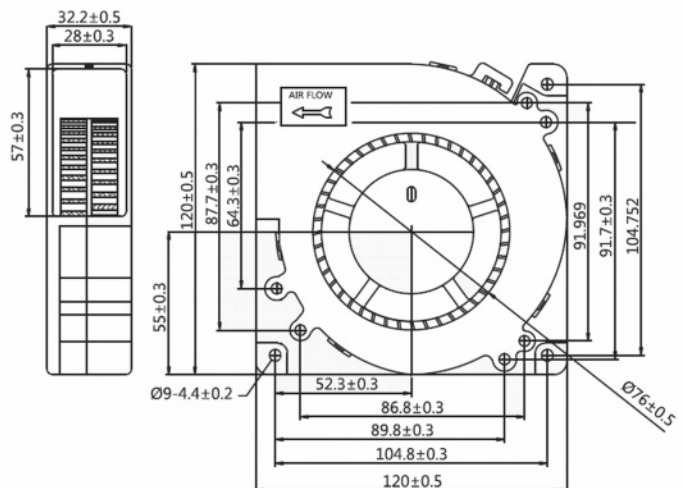

Above specification is only for reference and subject to change without notice.
以上数据仅供参考, 如有变更恕不另行通知。

www.mutualmotor.com