

AUTO
RESTAR

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC AXIAL FAN

□ 80 x 80 x 38 mm

M8038

[增压型]

Series



Impeller : 7 blades ,made of plastic PBT UL94 V-0

扇 叶: 7叶,PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor

電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/hmin]	Max. Static Pressure (静压) [InH₂O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M8038LD1	B/S	12	6.0~13.5	0.26	4000	57.2	1.62	0.37	92.1	38.5	175
M8038LD2	B/S	24	18.0~26.5	0.13	4000	57.2	1.62	0.37	92.1	38.5	175
M8038LD4	B/S	48	36.0~54.0	0.06	4000	57.2	1.62	0.37	92.1	38.5	175
M8038MD1	B/S	12	6.0~13.5	0.60	6000	80.6	2.28	0.74	184.3	50	178
M8038MD2	B/S	24	18.0~26.5	0.28	6000	80.6	2.28	0.74	184.3	50	178
M8038MD4	B/S	48	36.0~54.0	0.14	6000	80.6	2.28	0.74	184.3	50	178
M8038HD1	B/S	12	6.0~13.5	1.50	8000	113.3	3.21	1.28	318.7	61.5	178
M8038HD2	B/S	24	18.0~26.5	0.72	8000	113.3	3.21	1.28	318.7	61.5	178
M8038HD4	B/S	48	36.0~54.0	0.34	8000	113.3	3.21	1.28	318.7	61.5	178
M8038VD1	B/S	12	6.0~13.5	3.30	10000	148.7	4.2	2.12	527.9	77	180
M8038VD2	B/S	24	18.0~26.5	1.57	10000	148.7	4.2	2.12	527.9	77	180
M8038VD4	B/S	48	36.0~54.0	0.75	10000	148.7	4.2	2.12	527.9	77	180


Air Flow and Static Pressure

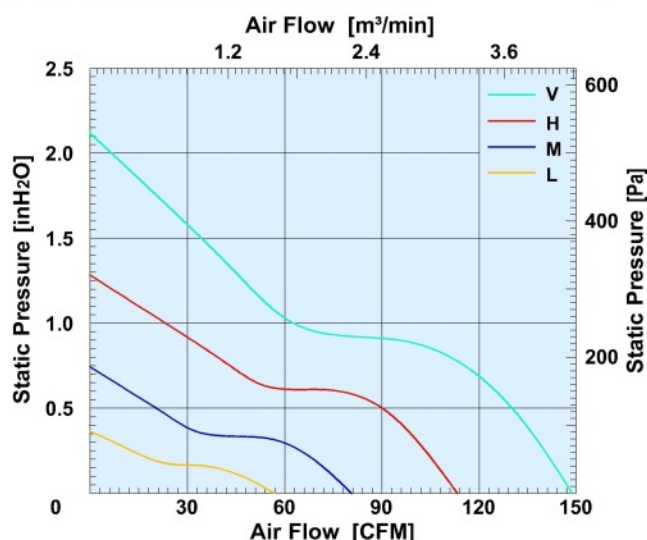

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。

Dimensions Drawing

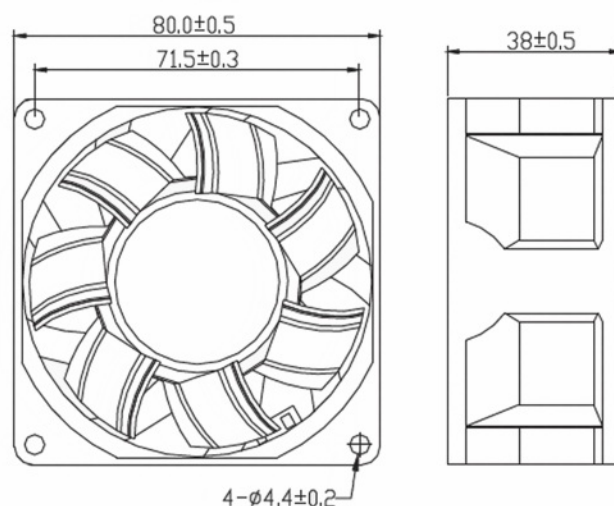

MUTUAL MOTOR

直流軸流風扇

www.mutualmotor.com