



M9232
Series

DC AXIAL FAN
□ 92 x 92 x 32 mm

AUTO
RESTAR

PWM

FG

RD
SIGNAL H

RD
SIGNAL L



Impeller : 7 blades ,made of plastic PBT UL94 V-0

扇 叶: 7叶,PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
M9232LD1	B/S	12	6.0~13.5	0.35	3000	53.4	1.51	0.24	59.8	37.5	190
M9232LD2	B/S	24	18.0~26.5	0.18	3000	53.4	1.51	0.24	59.8	37.5	190
M9232LD4	B/S	48	36.0~54.0	0.11	3000	53.4	1.51	0.24	59.8	37.5	190
M9232MD1	B/S	12	6.0~13.5	0.49	3500	60.8	1.72	0.31	77.2	40.5	194
M9232MD2	B/S	24	18.0~26.5	0.25	3500	60.8	1.72	0.31	77.2	40.5	194
M9232MD4	B/S	48	36.0~54.0	0.13	3500	60.8	1.72	0.31	77.2	40.5	194
M9232HD1	B/S	12	6.0~13.5	0.68	4000	68.2	1.93	0.38	94.6	43.6	196
M9232HD2	B/S	24	18.0~26.5	0.37	4000	68.2	1.93	0.38	94.6	43.6	196
M9232HD4	B/S	48	36.0~54.0	0.18	4000	68.2	1.93	0.38	94.6	43.6	196
M9232VD1	B/S	12	6.0~13.5	0.93	4500	78.1	2.21	0.43	107.1	46.2	200
M9232VD2	B/S	24	18.0~26.5	0.48	4500	78.1	2.21	0.43	107.1	46.2	200
M9232VD4	B/S	48	36.0~54.0	0.23	4500	78.1	2.21	0.43	107.1	46.2	200

Dimensions Drawing

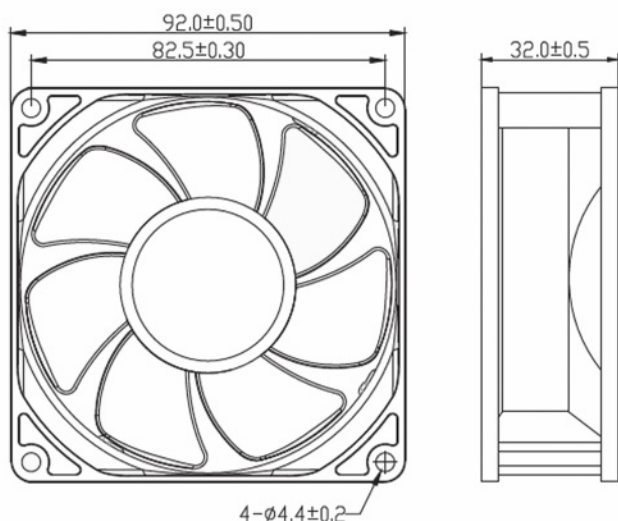

Air Flow and Static Pressure

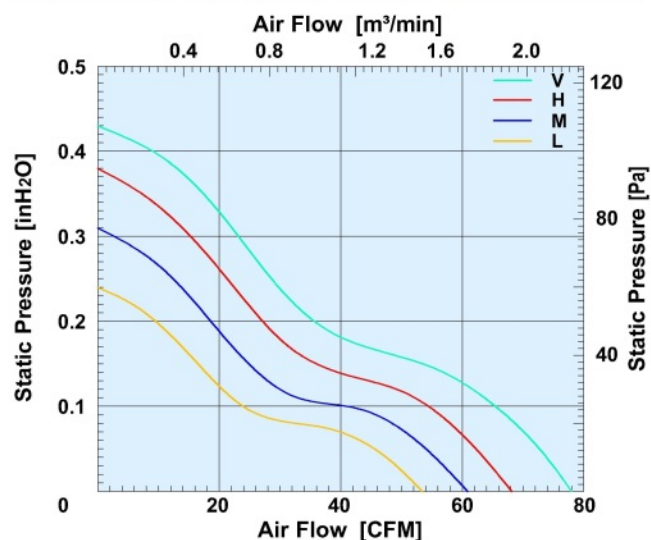

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。

直流軸流風扇

www.mutualmotor.com