

AUTO
(RESTART)

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC AXIAL FAN

□ 120x120x25 mm

M12025
[低速型]
Series



Impeller : 7 blades ,made of plastic PBT UL94 V-0

扇 叶: 7叶,PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0

扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor

電 機: 4极无刷直流


Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH₂O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
M12025LD1	B/S	5	3.6~6.9	0.43	1500	53.35	1.51	0.07	17.4	26	115
M12025LD2	B/S	12	6.0~13.5	0.18	1500	53.35	1.51	0.07	17.4	26	115
M12025MD1	B/S	5	3.6~6.9	0.71	2000	69.75	2.0	0.11	27.4	33	120
M12025MD2	B/S	12	6.0~13.5	0.27	2000	69.75	2.0	0.11	27.4	33	120
M12025MD4	B/S	24	18.0~26.5	0.17	2000	69.75	2.0	0.11	27.4	33	120
M12025VD2	B/S	12	6.0~13.5	0.65	2600	85.61	2.42	0.18	44.8	41	123
M12025VD4	B/S	24	18.0~26.5	0.30	2600	85.61	2.42	0.18	44.8	41	123

MUTUAL MOTOR


直流軸流風扇

www.mutualmotor.com

Air Flow and Static Pressure

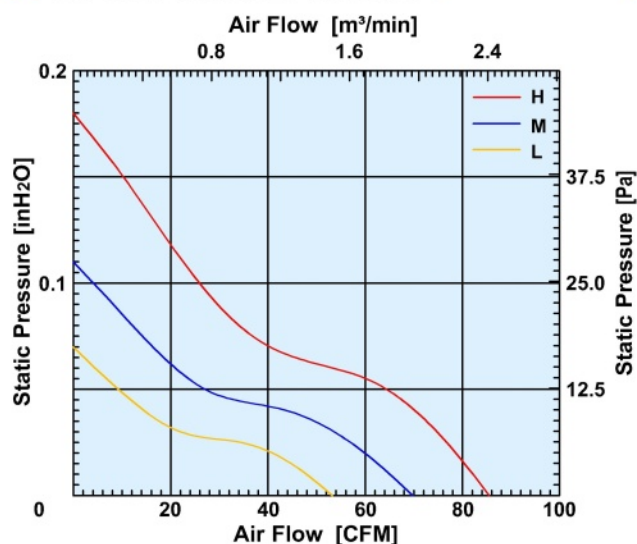

Dimensions Drawing

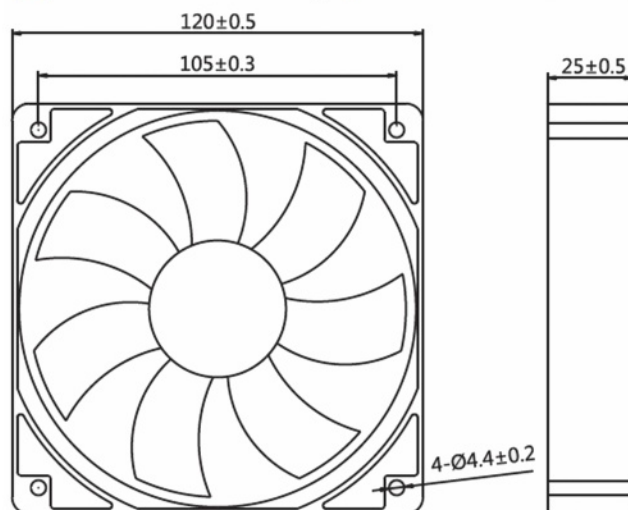

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。