

AUTO
RESTART

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

EC AXIAL FAN

□ 92 x 92 x 38 mm

M9238
[增压型]
Series



Impeller : 7 blades ,made of plastic PBT UL94 V-0

扇 叶: 7叶,PBT塑料制,阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0

扇 框: PBT塑料制,阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor


電 機: 4极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Voltage Range (电压范围) [VAC]	Freq. (频率) [Hz]	Input Power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [InH2O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M9238LE1	B/S	110	80~130	50/60	3.9	2500	49.05	1.39	0.25	62.25	28.9	197
M9238LE2	B/S	220	100~240	50/60	3.9	2500	49.05	1.39	0.25	62.25	28.9	197
M9238ME1	B/S	110	80~130	50/60	4.7	3000	58.86	1.66	0.30	74.7	34.7	200
M9238ME2	B/S	220	100~240	50/60	4.7	3000	58.86	1.66	0.30	74.7	34.7	200
M9238HE1	B/S	110	80~130	50/60	5.5	3500	68.67	1.94	0.35	87.15	40.5	202
M9238HE2	B/S	220	100~240	50/60	5.5	3500	68.67	1.94	0.35	87.15	40.5	202


MUTUAL MOTOR

EC 軸流風扇

Air Flow and Static Pressure

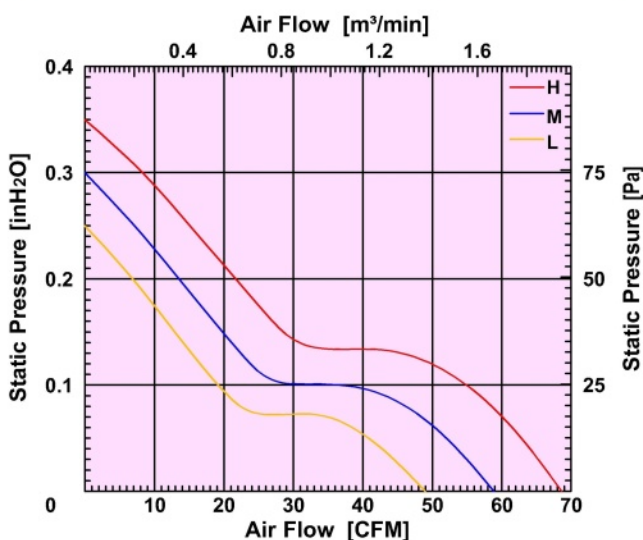

Dimensions Drawing

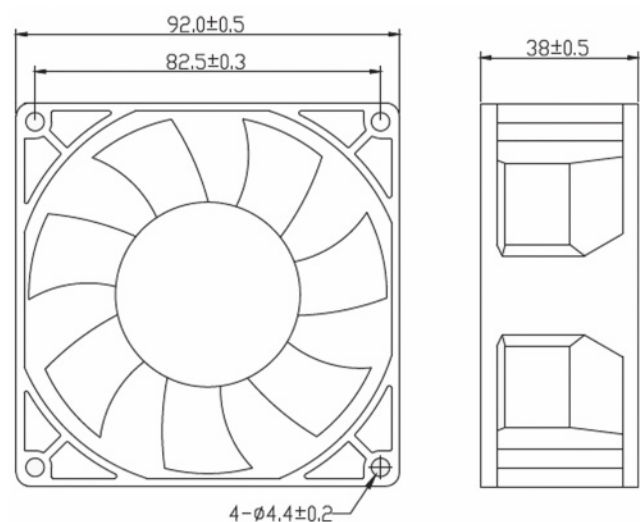

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。

www.mutualmotor.com