

AUTO
RESTART

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

DC Centrifugal Fan Ø225 x 100 mm

M225 Series



Impeller : Made of plastic ABS UL94 V-0

風 輪: ABS塑料制, 阻燃等级UL94 V-0

Frame : Made of die-cast Aluminum

外 框: 压铸铝合金

Motor : 8 Poles brushless DC motor

電 機: 8极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [InH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M225LD2	Ball	24	18.0~26.5	4.2	1500	384.2	653	1.08	269.7	60.5	1500
M225MD2	Ball	24	18.0~26.5	5.5	2000	512.3	871	1.93	479.4	66.7	1500
M225HD2	Ball	24	18.0~26.5	7.3	2500	640.4	1088.7	3.01	750	71.8	1500
M225LD4	Ball	48	36.0~54.0	2.0	1500	384.2	653	1.08	269.7	60.5	1500
M225MD4	Ball	48	36.0~54.0	2.8	2000	512.3	871	1.93	479.4	66.7	1500
M225HD4	Ball	48	36.0~54.0	3.5	2500	640.4	1088.7	3.01	750	71.8	1500




MUTUAL MOTOR


直流离心风机

www.mutualmotor.com

Air Flow and Static Pressure

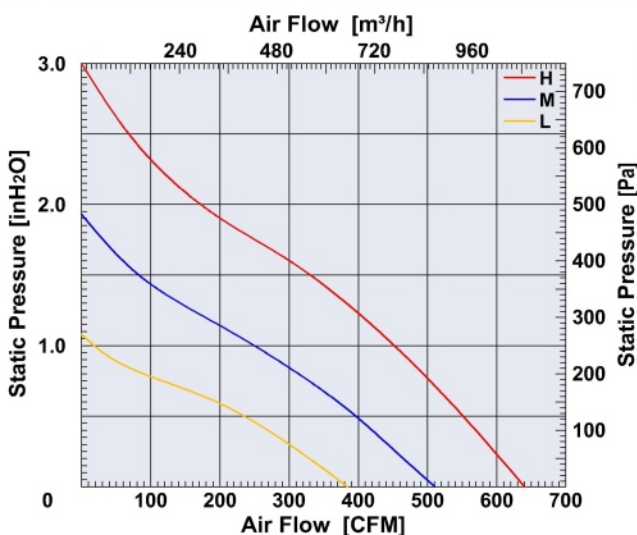

Dimensions Drawing

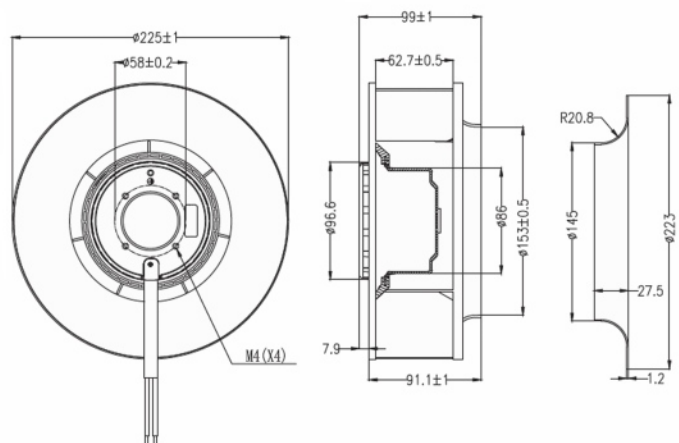

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。