

AUTO
RESTART

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

EC Centrifugal Fan Ø250 x 115 mm

M250 Series



Impeller : Made of plastic ABS UL94 V-0

風輪: ABS塑料制, 阻燃等级UL94 V-0

Frame : Made of die-cast Aluminum


外框: 压铸铝合金

Motor : 8 Poles brushless DC motor


電機: 8极无刷直流

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Voltage Range (电压范围) [VAC]	Freq. (频率) [Hz]	Input Power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [InH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
M250HE2	Ball	220	100~240	50/60	123	2750	657	1117.7	2.70	671.1	74.5	2000

Air Flow and Static Pressure

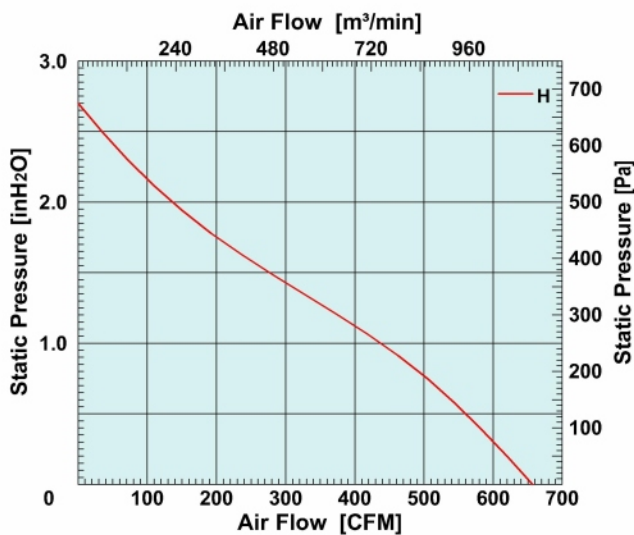

Dimensions Drawing

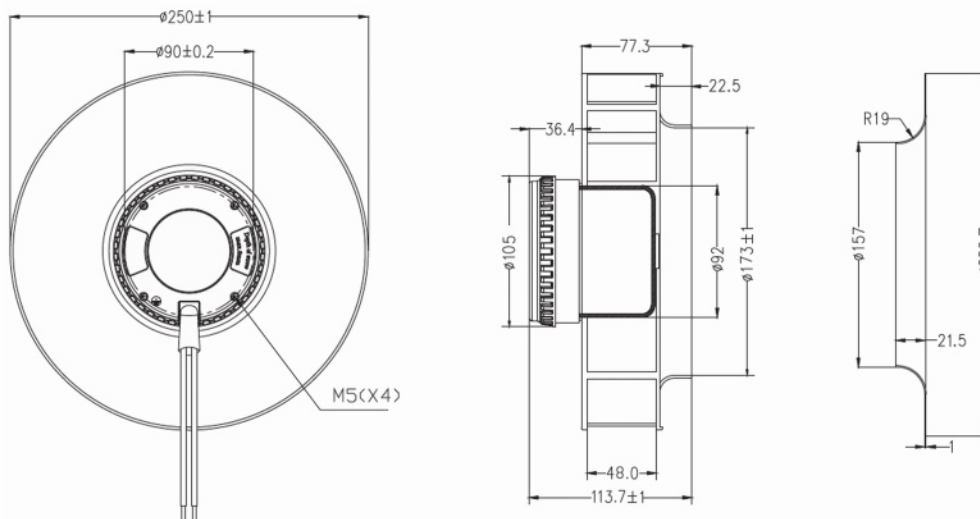

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。



MUTUAL MOTOR

EC

离心
風機

www.mutualmotor.com